


25CS

KEEP ON GOING



NRC 
NRC-INDUSTRIES.COM

OUTREACH. OUTLAST.

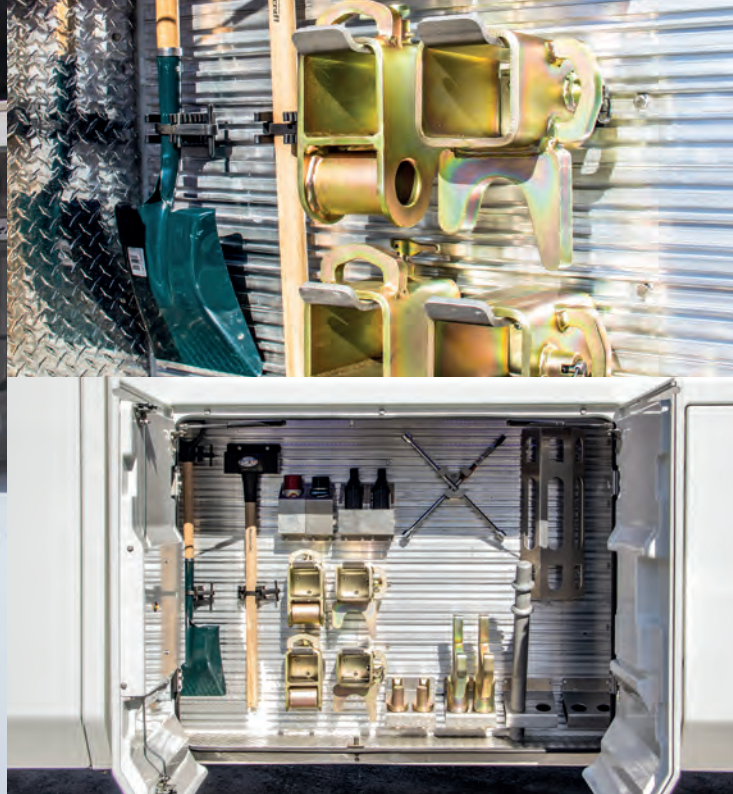

GO AHEAD

t o w a w a y



You need a smaller, cost-effective and powerful single axle unit, yet your contract requires a 25T rating? Then consider the 25CS! It features the proven Slider System and a stylish, long lasting Composite Body, so you benefit from the power and versatility of the larger Composite Sliders, packaged in a smaller unit that will make heads turn!

Great return on investment: This affordable, light and dependable unit has a very low operating cost.

Great performance: The Slider System provides this unit with recovery capabilities and flexibility that are simply unmatched by others in its category. Combine the 25CS with the NRC Tag Axle and boost its towing capacity to a higher level.

More fun: Conveniently located controls, easy access lockers and a new, interference-free, quick-latching detachable underlift turns every jobsite into a playground.

NRC

www.nrc-industries.com
Tel: 450 379-5796

DISTRIBUTOR:



PM Industries Ltd.
1785 Mills Road, North Saanich
1-855-656-1689
sales@pmindustries.ca

WRECKER SPECIFICATIONS

Capacity: 25 Tons
Working hydraulic pressure: 3000 PSI
Composite body 102" wide (including fenders)
140" CA (from cab to center of rear axle)

BOOM SPECIFICATIONS

Two stage boom: Standard
Boom structural rating fully retracted: 50,000 lbs @40°
Boom structural rating fully extended: 20,000 lbs @55°
Reach past tailgate fully extended : 167"
Maximum Boom working height : 272"
Boom range of elevation: 55°
360° sheave head

WINCHES & STEEL WIRE ROPE

Dual 25,000 lbs planetary winches
Wire rope: 5/8" x 200"
Air tensioners
Air free spool
Optional: 2 speed winches

UNDERLIFT SPECIFICATIONS

BASIC FORKS - 4 SETS - ALL UNDERLIFTS

- * 1 x Standard Bracket Set
- * 1 x Swivel Receivers Set
- * 1 x Back Axle Forks Set
- * 2 x Chain forks

HD -3

- * Reach (from tailboard) fully retracted : 68" <1727 mm>
- * Reach (from tailboard) fully extended : 99.5" <2538 mm>
- * Structural rating fully retracted : 35,000 lbs <16,000 kg>
- * Structural rating fully extended : 15,000 lbs <6800 kg>

HD-3 (Euro)

- * Reach (from tailboard) fully retracted : 74.6" <1895 mm>
- * Reach (from tailboard) fully extended : 144.5" <3670 mm>
- * Structural rating fully retracted : 35,000 lbs <16,000 kg>
- * Structural rating fully extended : 16,000 lbs <7250 kg>